




型号：ZFL03806405-10M-01

可调焦 高清 2/3"~1"芯片 低畸变

产品尺寸图

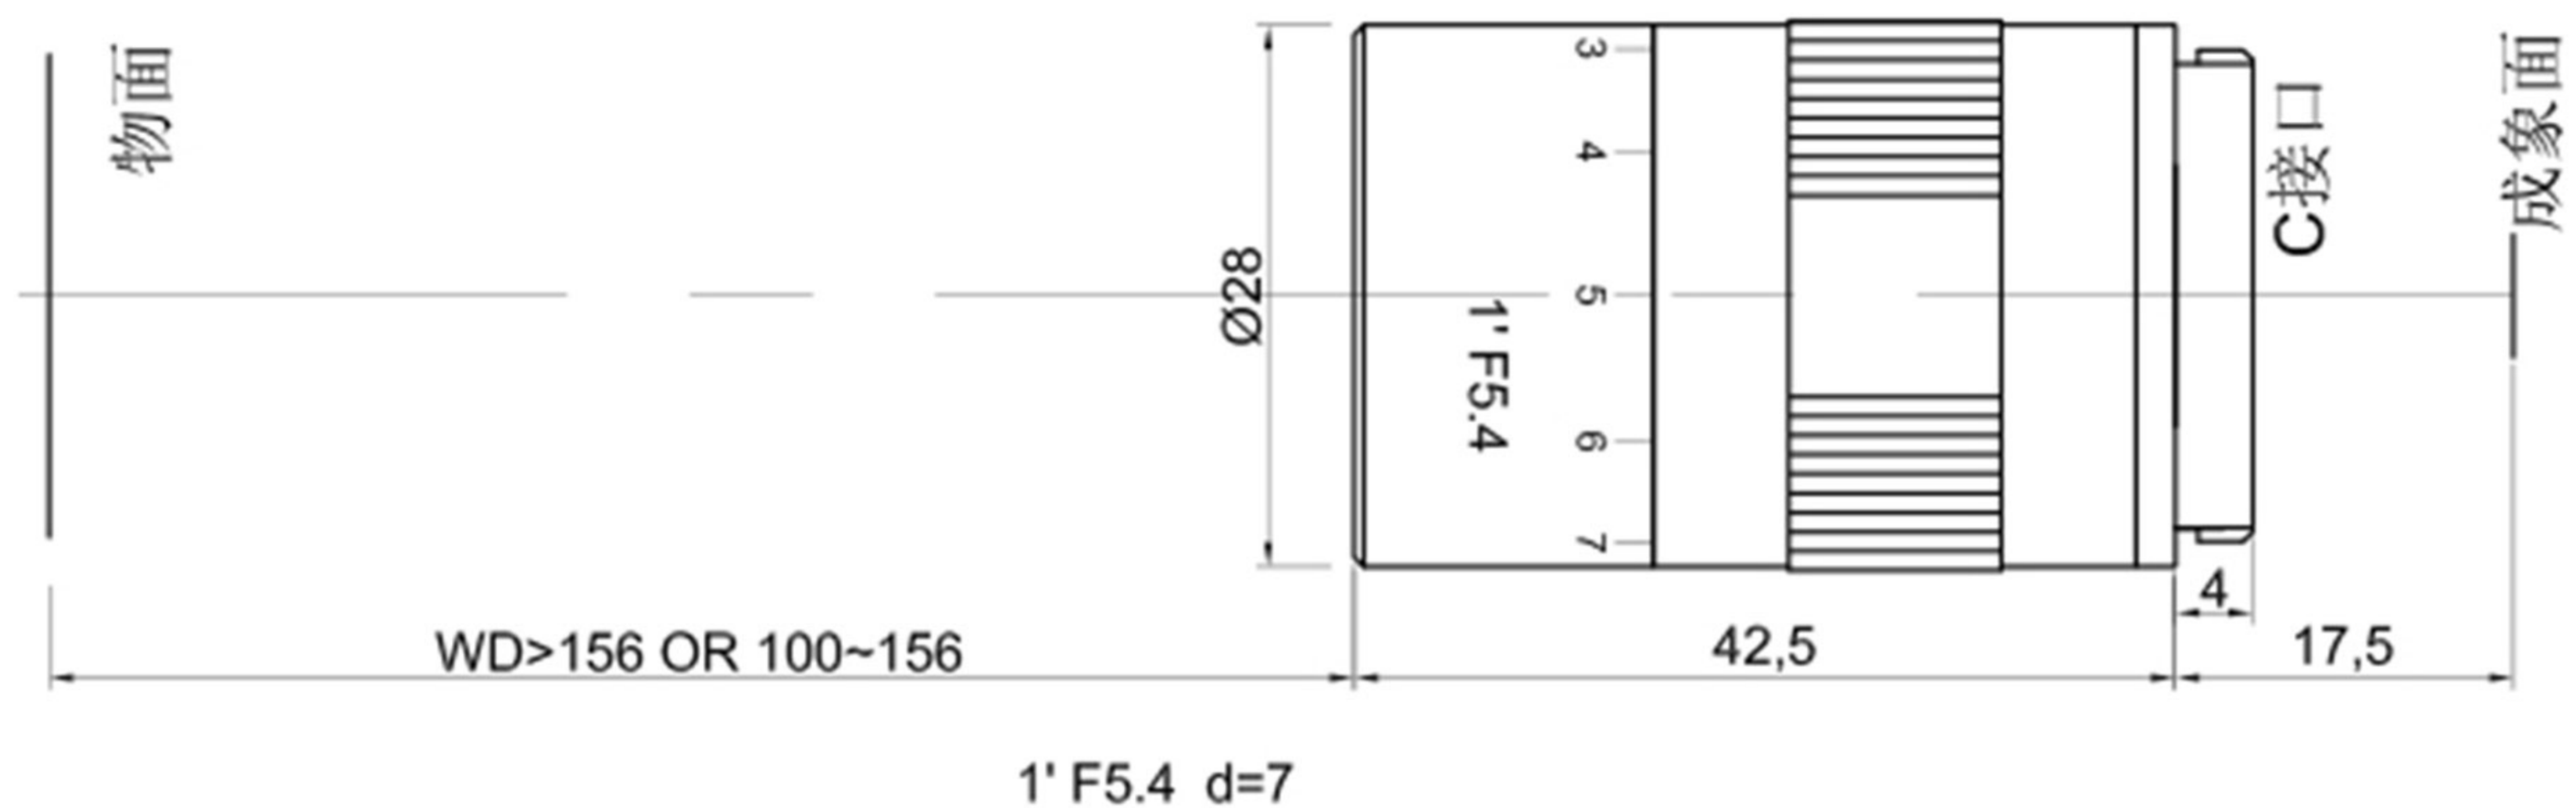

主要参数

2/3"~1" C-Mount								
倍数	工作距WD	景深mm	数值孔径NA	分辨率mm	F/#	畸变<%	接口	最大接收器
0.02	1920	1280	0.002	0.215	5.4	0.11	C	2/3"~1"
0.04	865	278	0.004	0.093	5.4	0.11	C	2/3"~1"
0.06	565	126	0.005	0.063	5.4	0.11	C	2/3"~1"
0.08	415	69	0.007	0.046	5.4	0.11	C	2/3"~1"
0.1	402	44	0.009	0.037	5.4	0.1	C	2/3"~1"
0.12	340	33	0.010	0.034	5.4	0.1	C	2/3"~1"
0.15	278	23	0.012	0.029	5.4	0.1	C	2/3"~1"
0.2	216	13	0.016	0.021	5.4	0.1	C	2/3"~1"
0.25	180	8	0.019	0.018	5.4	0.1	C	2/3"~1"
0.3	156	6	0.022	0.015	5.4	0.08	C	2/3"~1"
0.35	130	5	0.025	0.013	5.4	0.08	C	2/3"
0.4	118	4	0.028	0.012	5.4	0.07	C	2/3"
0.5	103	2	0.033	0.010	5.4	0.07	C	2/3"
0.6	84	2	0.037	0.009	5.4	0.07	C	2/3"
0.7	68.0	1.4	0.041	0.008	5.4	0.02	C	2/3"
0.8	65.0	1.1	0.045	0.007	5.4	0.02	C	2/3"
0.9	64.3	1.0	0.047	0.007	5.4	0.02	C	2/3"
1	63.9	0.8	0.050	0.007	5.4	0.02	C	2/3"

0.35-0.5倍数镜头需加10mm接圈； 0.6倍数镜头需加20mm接圈； 0.7-1倍数镜头需加30mm接圈。
光圈F/#可选5.4、7.7、9.6、12、19六种，光圈变化时分辨率与景深也会随之变化。