




型号：ZFL00195505-03M-01

可调焦 高清 4/3"芯片 低畸变

产品尺寸图

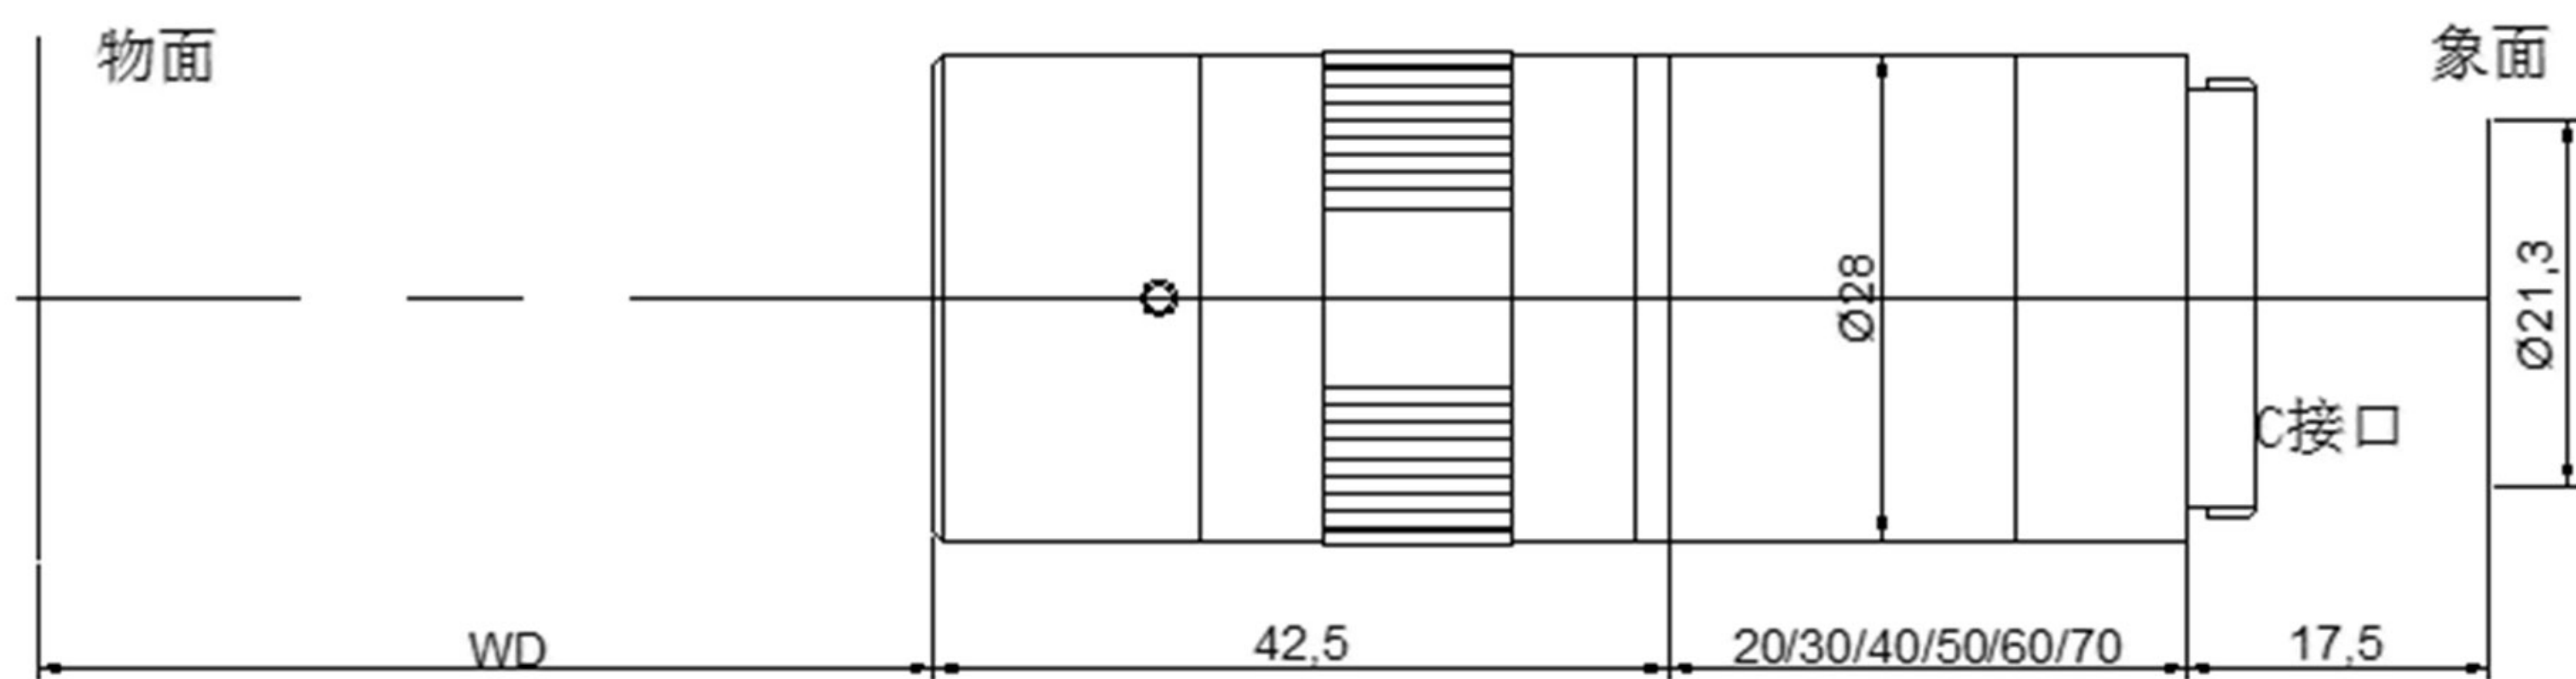

主要参数

4/3" C-Mount									
倍数	工作距WD	景深mm	数值孔径NA	分辨率mm	F/#	畸变<%	接口	最大接收器	筒长
0.1	610	62	0.007	0.052	6.3	0.1	C	4/3"	62.5
0.2	321	13	0.015	0.022	6.3	0.1	C	4/3"	72.5
0.25	268	9	0.018	0.019	6.3	0.1	C	4/3"	72.5
0.3	232	6.3	0.021	0.016	6.3	0.1	C	4/3"	72.5
0.35	200	4.8	0.024	0.014	6.3	0.1	C	4/3"	72.5
0.4	180	3.8	0.026	0.013	6.3	0.1	C	4/3"	82.5
0.5	148	3.2	0.025	0.013	6.3	0.1	C	4/3"	82.5
0.6	135	2.4	0.028	0.012	6.3	0.1	C	4/3"	92.5
0.7	116.0	1.8	0.031	0.011	6.3	0.1	C	4/3"	92.5
0.8	112.0	1.5	0.033	0.010	6.3	0.1	C	4/3"	102.5
0.9	100.0	1.3	0.035	0.010	6.3	0.1	C	4/3"	102.5
1	99.0	1.1	0.038	0.009	6.3	0.1	C	4/3"	112.5

光圈F/#可选6.3、9.5两种，光圈变化时分辨率与景深也会随之变化。